

Low Pressure Series

Model 2921

- **compact measurements**
diameter 13 mm, length 75 mm
- **small dosage volumes – high flow rates**
smallest volume 0.5 µl – flow up to 18 ml/min
- **high dosage precision**
precision CV 1 %
- **high service life**
wear resistant tungsten carbide
- **pulseless delivery – low shear stress**
rotary micro annular gear technology



The compact micro annular gear pump m2r-2921 out of the low pressure series is an attractive and innovative pump option in analytical instrumentation. The m2r-pump generates a pulseless,

highly precise but also dynamic flow with low shear stress. It is capable of dispensing smallest volumes in the micro liter range at high precision. With its compact design smallest measurements can

be achieved. The pumps are suitable for dosage of low viscous liquids such as deionized water, watery solutions, methanol, solvents, oil and lubricants.


Applications

- Analysis technology
- Fuel cells
- Biotechnology
- Laboratory automation
- Micro reaction technology


Technical data

Flow rate	0.003 * – 18 ml/min (min. 10 µl/h *)
Smallest dosage volume	0.5 µl
Displacement volume	3 µl
Differential pressure range	0 – 3 bar (44 psi)
Max. inlet pressure	1 bar (15 psi)
Pulsation	6 %
Operating temperature range	-20 ... +60°C
Viscosity range	0.5 ... 100 mPas (max. 1000 mPas *)
Precision	1 % Coefficient of Variation CV
Speed range	1 * – 6000 rpm
Fluid connections	slip fittings with outside diameter 2 mm optional: manifold assembly
Wetted parts	nickel-silver/ stainless steel 316L, ceramics, tungsten carbide Ni-based, epoxy resin shaft seal: graphite reinforced Teflon®, 316L static seals: FPM Viton®, optional: EPDM, FFPM
Motor	DC-motor with graphite brushes, assigned power rating 3 W, nominal voltage 18 V, digital magnet encoder 16 counts per turn
Electrical connection	10-pole connector
Measurements	diameter 13 mm, length 75 mm
Weight	approx. 56 g

Customized solutions on request. * with accessories

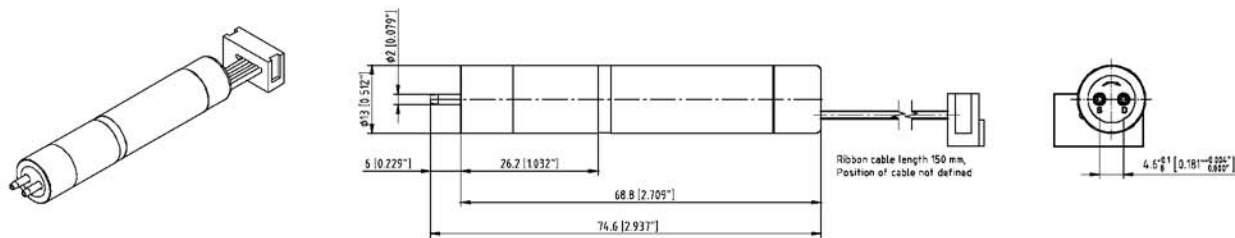



Configuration slip fittings OD 2 mm

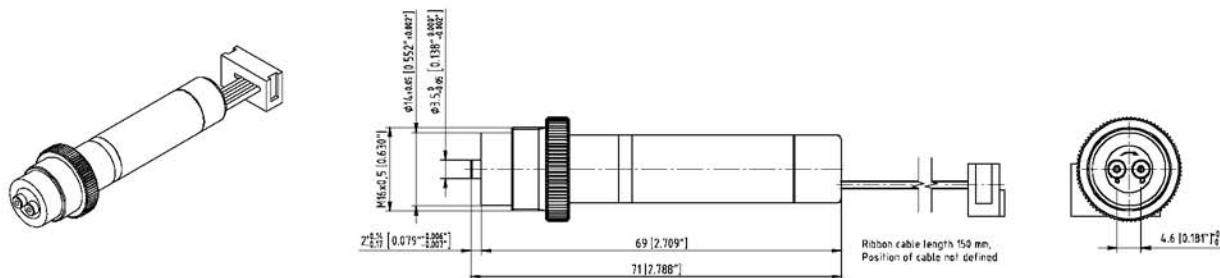

Configuration manifold assembly

Subject to technical changes.

Flow charts

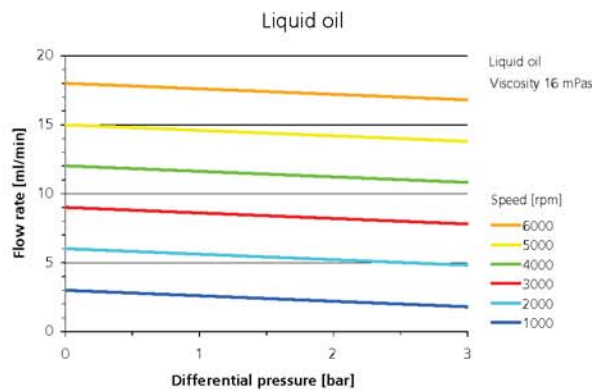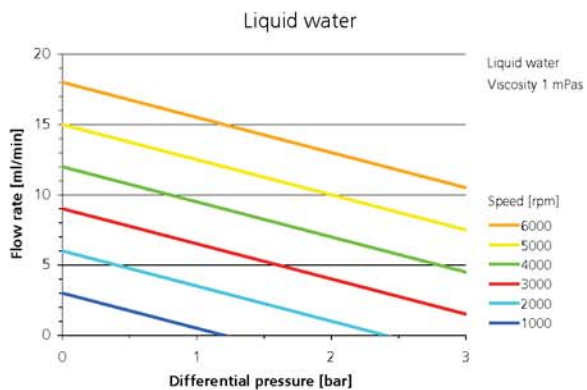

Accessories

- Fluidic accessories* tubes, filters etc.
- Reduction gear* gears 4.1:1, 17:1, 67:1 reduce speed for small volume dispensing and the metering of more viscous liquid
- Alternative drives* motor with digital encoder with 256 impulses/turn for higher uniformity and precision at low rotational speeds
- Control* S-ND: programmable microcontroller based control for continuous and discrete dosage
S-KD-21: control for continuous dosage
- Console drive module* diecast aluminum chassis mzs-S06 for laboratory and testing
- Multiplexer module* operation of up to 255 pumps with a single RS-232 interface

ACTUAL PERFORMANCE MAY VARY

Specifications are subject to change without notice.

©2001 Micropump, Inc., A Unit of IDEX Corporation. Micropump and the Micropump logo are registered trademarks of Micropump, Inc. All other trademarks belong to their respective owners.

MP200MPV03:2003

MICROPUMP, INC.

A Unit of IDEX Corporation
Phone: (360) 253-2008 • (800) 671-6269
Fax: (360) 253-2401 • (800) 222-9565

MICROPUMP LIMITED

A Subsidiary of Micropump, Inc.
Phone: + 44 (0) 1480 356900
Fax: + 44 (0) 1480 356920

info.micropump@idexcorp.com
www.micropump.com

